



CCTX Flanged End Swing Check

Product features:

Rugged Carbon Steel Body
316SS Disc Standard
ANSI and API-6A Flanges
Bolted Bonnet With Tap Is Standard
API 6D and API 6A Valves

Parts


Body
Disc

Seals

Standard Material


ASTM A216 WCC*
316SS
Stellite Overlay Optional
Replaceable Viton Seal

* Conforms to latest edition of Nace MR-01-75.

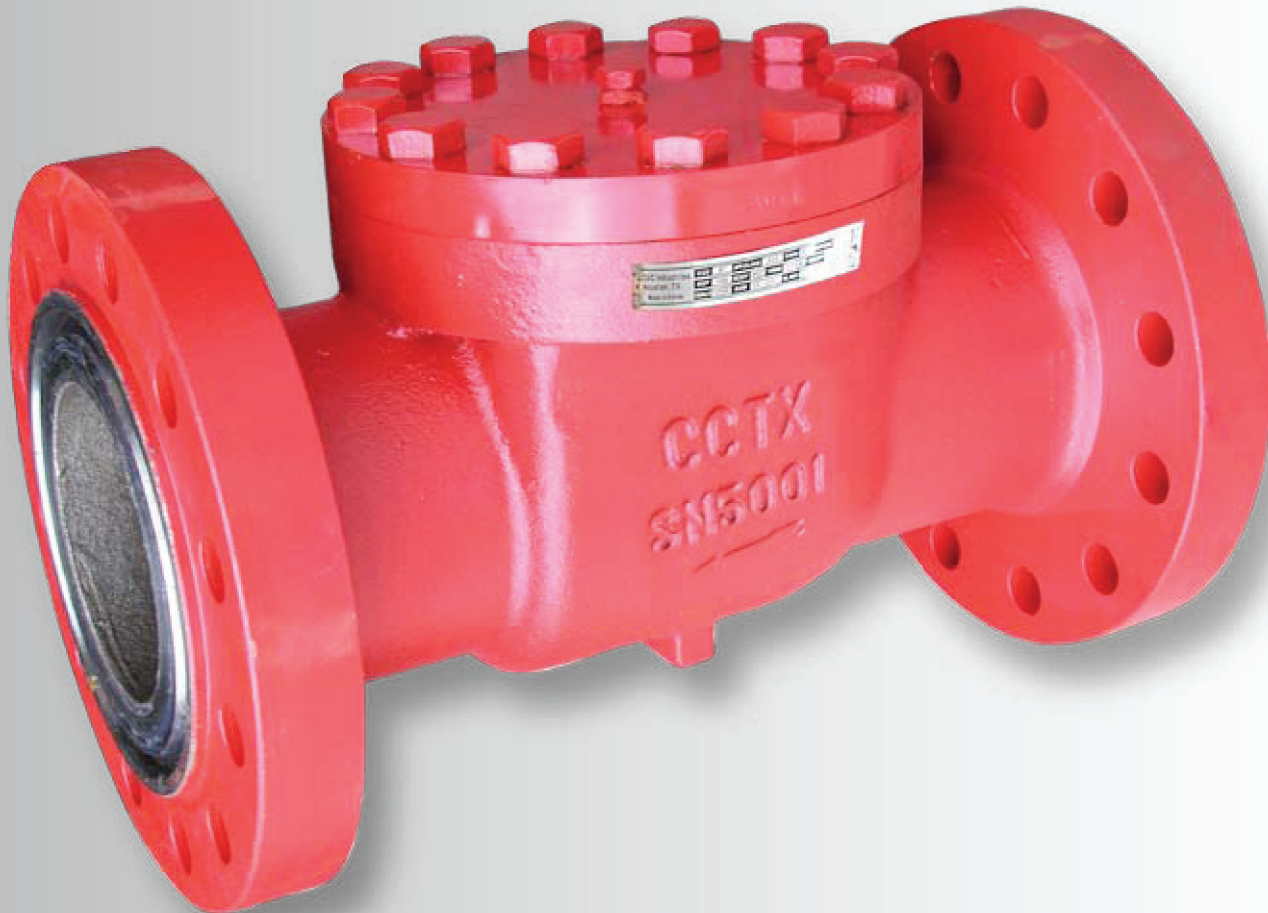



CCTX Flanged End Swing Check

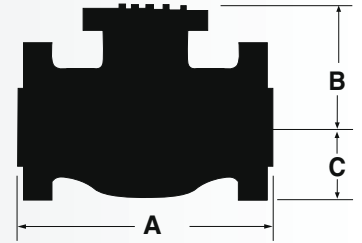

Size	ANSI/API Class	DIMENSIONS (IN.)				WT./LBS.
		A-RF	A-RTJ	B	C	
2"	150	8.00"	–	4.25"	3.00"	20
	300	10.50"	–	4.25"	3.25"	25
	600/API 2000	11.50"	11.62"	4.25"	3.25"	50
	900/API 3000	14.50"	14.62"	7.25"	4.25"	80
	1500/API 5000	14.50"	14.62"	7.25"	4.25"	120
3"	150	9.50"	–	5.31"	3.75"	50
	300	12.50"	–	5.31"	4.12"	65
	600/API 2000	14.00"	14.12"	5.31"	4.12"	100
	900/API 3000	15.00"	15.12"	7.44"	4.75"	115
	1500/API 5000	18.50"	18.62"	7.44"	5.25"	130
4"	150	11.50"	–	5.88"	4.50"	75
	300	14.00"	–	5.88"	5.00"	100
	600/API 2000	17.00"	17.12"	6.12"	5.38"	155
	900/API 3000	18.00"	18.12"	8.19"	5.75"	215
	1500/API 5000	21.50"	21.62"	8.31"	6.12"	365
6"	150	14.00"	–	8.00"	5.50"	110
	300	17.50"	–	8.62"	6.25"	185
	600	22.00"	22.12"	9.00"	7.00"	300
	900	24.00"	24.12"	9.19"	7.50"	435
	1500	27.75"	28.00"	10.75"	7.75"	770
8"	150	19.50"	–	10.00"	6.75"	220
	300	21.00"	–	10.12"	7.50"	375
	600	26.00"	26.12"	10.75"	8.25"	560
	900	29.00"	29.12"	11.00"	9.25"	775
	1500	32.75"	33.12"	12.75"	9.50"	1225
10"	150	24.50"	–	13.00"	8.00"	530
	300	24.50"	–	13.00"	8.75"	535
	600	31.00"	31.12"	14.62"	10.00"	1025
	900	33.00"	33.12"	15.50"	10.75"	1250
	1500	39.00"	39.38"	18.25"	11.50"	1565
12"	150	27.50"	–	13.62"	9.50"	350
	300	28.00"	–	14.50"	10.25"	900
	600	33.00"	33.12"	16.38"	11.00"	1350
	900	38.00"	38.12"	17.25"	12.00"	1625
	1500	44.50"	45.12"	20.50"	13.25"	2050