



CCTX Gate Valve

Bolted Bonnet, Outside Screw & Yoke

Class 150, 300, 600


Product Standards:

Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Basic Design	API 600
Testing	API 598

Description

Body	ASTM A216 Gr. WCB
Seat Ring	ASTM A105 + Stellite
Wedge	ASTM A216 Gr. WCB + 13 Cr
Stem	ASTM A182 F6a
Gasket	304 + Flexible Graphite
Bonnet	ASTM A216 Gr. WCB
Back Seat	ASTM A276 410
Packing	Stainless Steel Wire Flexible Graphite
Gland	ASTM A276 410
Gland Flange	ASTM A216 Gr. WCB
Stem Nut	ASTM A493 Gr. D2
Gland Nut	ASTM A29 1035
Handwheel	ASTM A395 Ductile Iron
Lock Nut	ASTM A29 1035
Difiller	ASTM A570 Gr.A
Eye Bolt	ASTM A193 Gr. B7
Eye Nut	ASTM A194 Gr. 2H
Pin	ASTM A29 1035
Split Pin	ASTM A570 Gr.A
Bolt	ASTM A193 Gr. B7
Nut	ASTM A194 Gr. 2H
Rivet	ASTM A182 304
Name Plate	ASTM A182 304

Standard Material

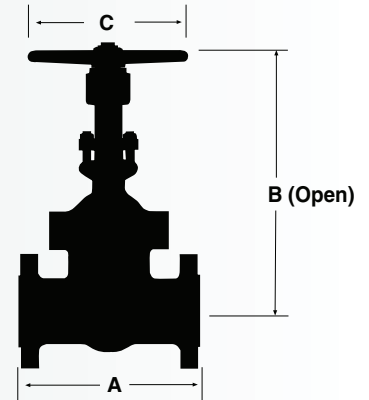

Class 150

Size	A	B	C	WT
2"	7.0	15.20	7.87	44
2.5"	7.5	17.13	7.87	66
3	8.0	19.02	9.84	80
4	9.0	23.11	9.84	133
6	10.5	30.20	11.81	187
8	11.5	37.60	13.78	300
10	13.0	45.12	15.72	484
12	14.0	52.28	17.72	711

Class 300

Size	A	B	C	WT
2	8.5	16.42	7.87	66
2.5	9.5	18.11	9.84	86
3	11.125	20.71	9.84	121
4	12.0	25.39	9.84	183
6	15.875	32.44	13.78	302
8	16.5	38.86	17.72	445
10	18.0	46.93	17.72	733
12	19.75	56.34	19.69	1180

Class 600

Size	A	B	C	WT
2	11.5	16.81	9.84	91
2.5	13.0	18.62	9.84	128
3	14.0	21.18	11.81	194
4	17.0	25.87	13.78	289
6	22.0	34.33	19.69	557
8	26.0	43.35	22.05	909
10	31.0	50.35	25.20	1371
12	33.0	58.50	25.20	1725

Phone: 713.466.1644 • Toll Free: 1.877.996.9911 • Fax: 713.466.1715 • Website: www.candcvalve.com

Note: Available through 48" POA